

CORROSION TESTING EQUIPMENT

chemical quality testing

Depending on the test specifications, the process systems Salt Spray [S], Condensation Water [K], Ambient Air [B], Hot Air [W], Pollution Gas [G] and controlled Relative Humidity [F] can be combined individually or as combinations (cyclic tests) in over 90 variants. Testing conditions up to -20°C (lower temperatures on request) and phases of irrigation (Volvo STD 423 and Ford CETP 00.00-L-467) are possible. The units are intuitive to use, optional as a practical manual or process-safe automatic solution with touchscreen.



Gebr. Liebisch GmbH & Co. KG



Eisenstraße 34 33649 Bielefeld | Germany



Tel: +49 521 94647 -0 Fax: +49 521 94647 -90




sales@liebisch.com www.li̇̃ebisch.de



Made in Germany since 1963 the sign of future



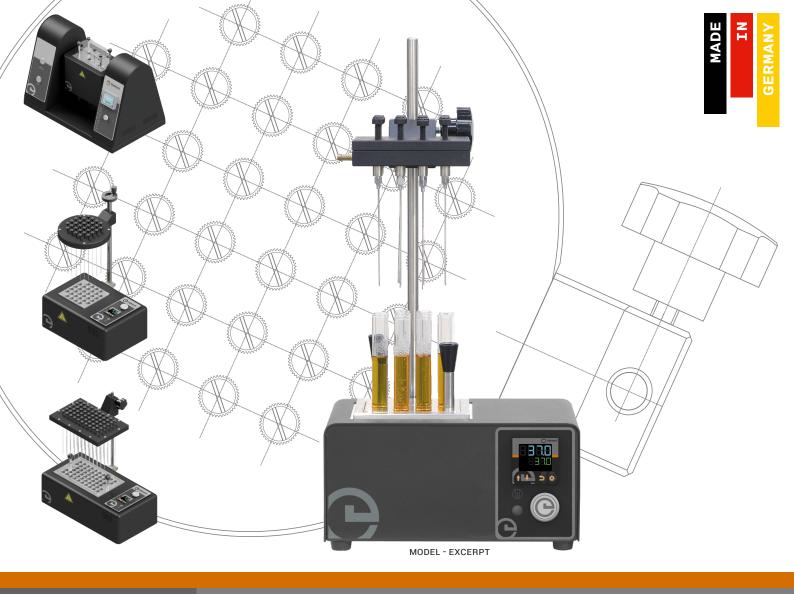









METALBLOCKTHERMOSTATS

liquidless temperature control

Clean sample handling and total temperature range from -10°C to +500°C. More than 150 variants with fixed and interchangeable blocks for your individual requirements. If you cannot find a suitable device for your special process in the standard program, special solutions are also realized.

Gebr. Liebisch GmbH & Co. KG



Eisenstraße 34 33649 Bielefeld | Germany



Tel: +49 521 94647 -0 Fax: +49 521 94647 -90



sales@liebisch.com www.liebisch.de



Made in Germany since 1963
the sign of future